


EschmannStahlGrade
ES MULTIFORM^{SL}

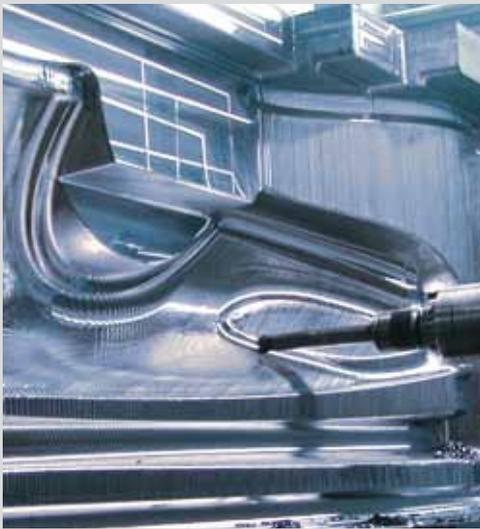

Products


ESCHMANNSTAHL

Facts & Figures

Material

Reference analysis in %						
Material	C	Mo	Cr	Ni	Mn	
ES MULTIFORM ^{SL}	0.39	0.2	2.0	0.2	–	+ trace elements
1.2738 EST	0.4	0.25	2.0	1.0	1.5	
1.2311 EST	0.4	0.2	1.9	–	1.5	


Tensile Strength

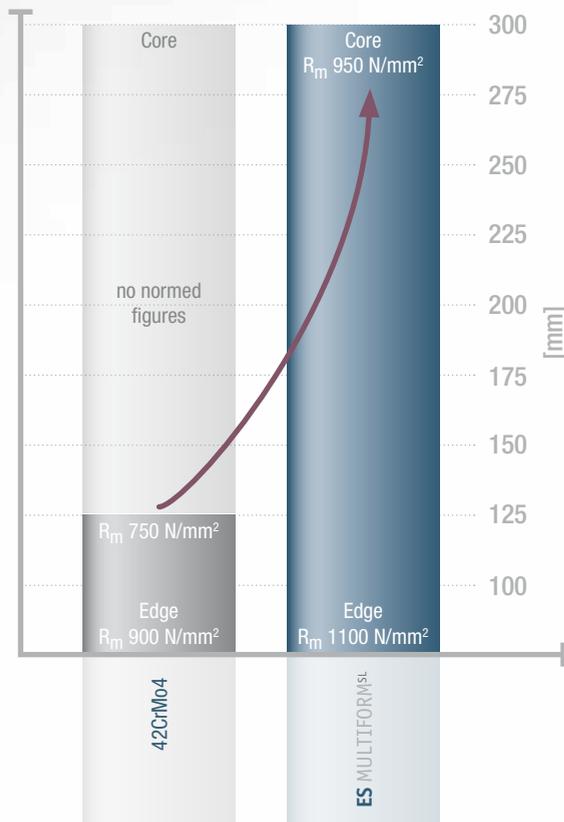

Heat Conductivity [W/mK]

Material	20 °C	350 °C	700 °C
ES MULTIFORM ^{SL}	39.6	37.5	30.6
1.2738 EST	35.5	33.2	31.9
1.2311 EST	34.5	33.5	32.0

At 300 °C: 38.2 W/mK

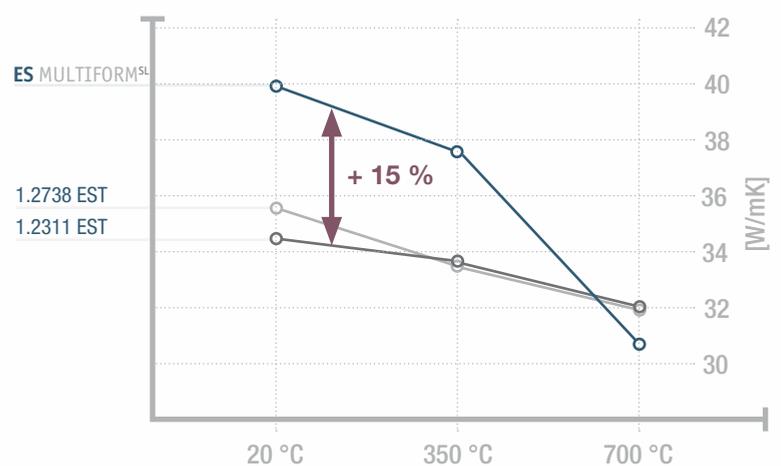

Heat Treatment Data


Process step	Temperature	Duration	Cooling
Stress relief heat treatment	max. 480 °C	min. 4 h	furnace



Broad Scope for Versatile Application Areas

The positive properties of construction steel and tool steel were merged to a multi-use material. Due to its reduced percentage of nickel, the steel is unrivalled among its competitors.

- Stable mechanical parameters
- Completely suitable for graining
- Good machinability
- High degree of heat conductivity

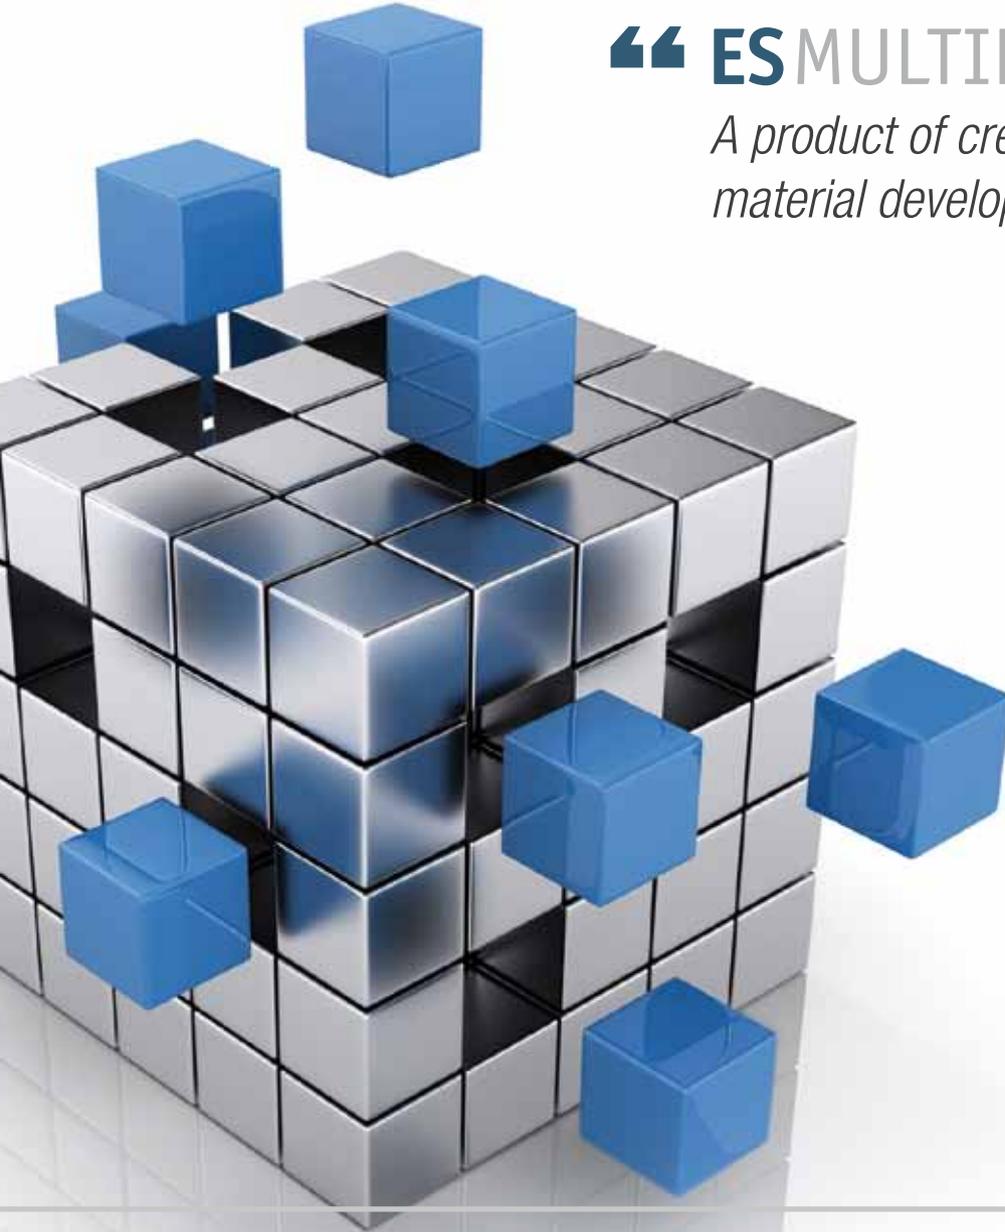

“ ES MULTIFORM^{SL} –
*A product of creative
material development!* ”

Creative Material Technology Has a Name – **ES MULTIFORM^{SL}**

The unique EschmannStahlGrade offers all-round properties for a range of industries:

- Improved full quenching and tempering properties against 42CrMo4
- Rolled sheets up to 150 mm strength are stress relief heat treated
- Polishable
- All surface treatment processes possible
- Good weldability
- High degree of toughness



Tool and Mold Making

Ideal for demanding resin molds – unlimited graining suitability with high degree of heat conductivity



Mechanical Engineering

Uniform machining properties and the capacity for full quenching and tempering provide for an efficient application in mechanical engineering.



Hydraulic applications

Mold frames Gears

Mechanical engineering components

Extrusion dies

Control units

Hydraulics

Drawing parts

Control engineering

Dies for film/sheet extrusion

Pumps

Generator sets

Molds


Racks

Valves

Your Benefits

- Cost-effective alternative to 1.2738 due to reduced nickel percentage
- Low distortion in machining
- High surface quality due to good polishability
- Nitriding, welding as well as laser hardening/inductive hardening and coating with all current technologies
- Good production and process safety due to high degree of toughness
- Excellent heat conductivity for more dynamic tempering
- Constant mechanical data provides for excellent calculation reliability
- Uniformly high tensile strength right up to the core
- Stable machining properties due to homogenous microstructure



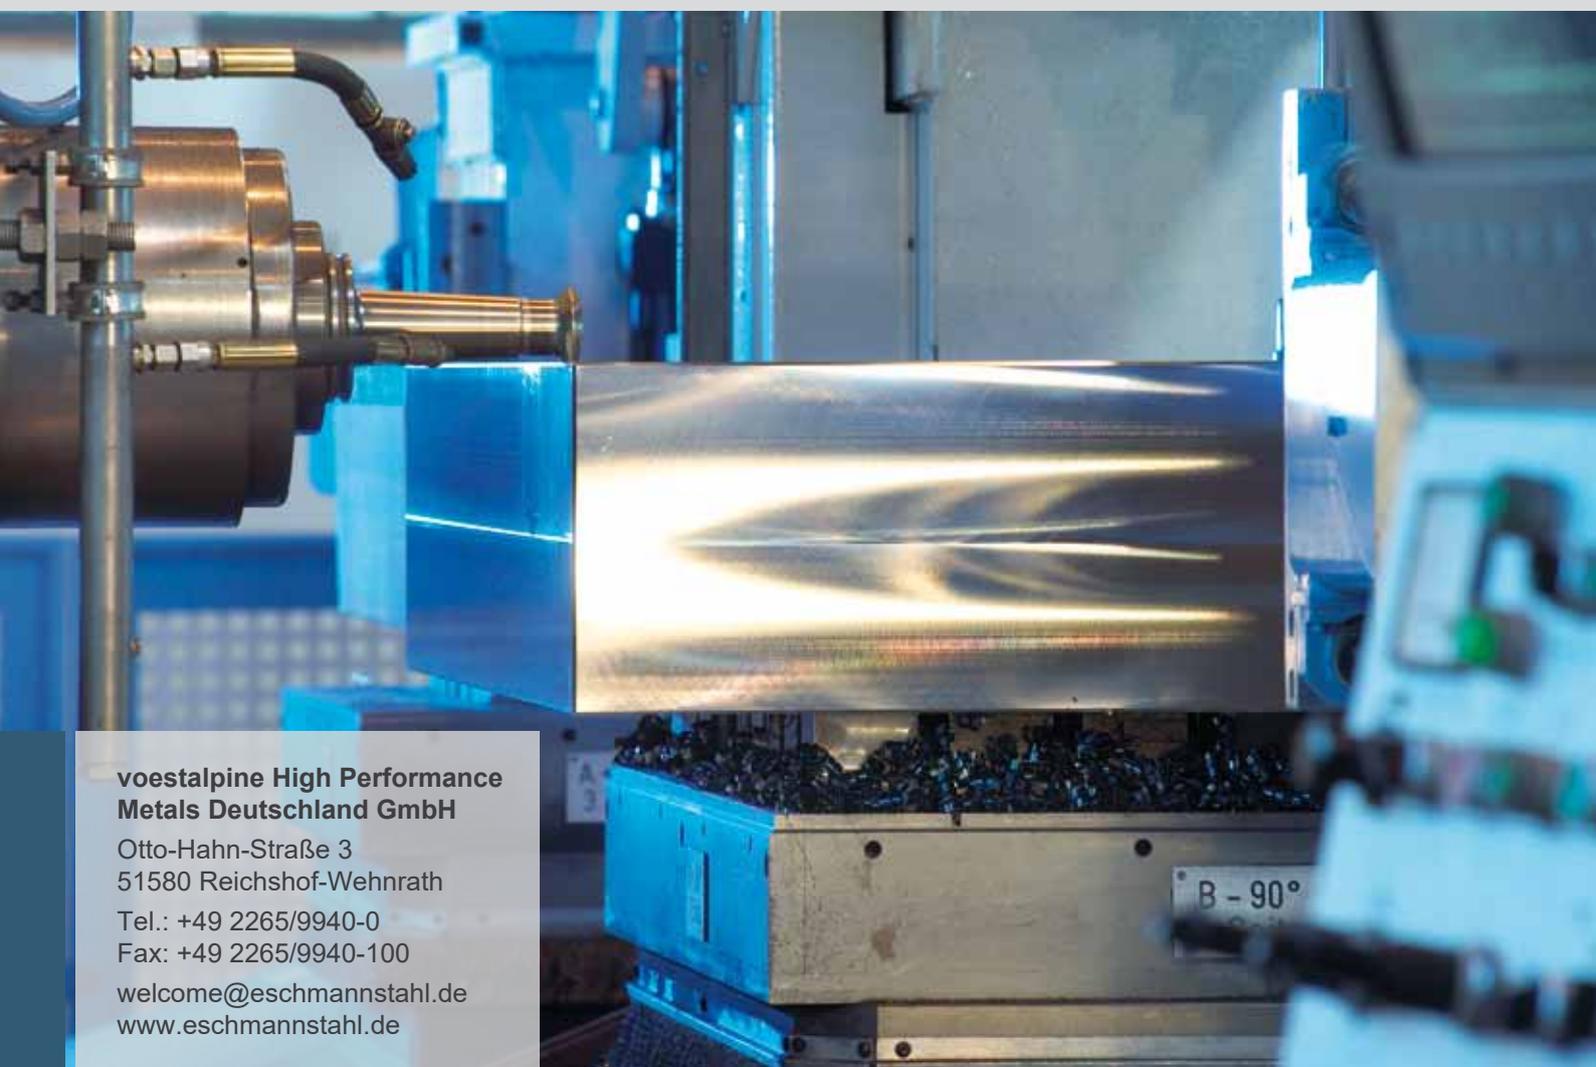

**voestalpine High Performance
Metals Deutschland GmbH**

Otto-Hahn-Straße 3
51580 Reichshof-Wehnrath

Tel.: +49 2265/9940-0

Fax: +49 2265/9940-100

welcome@eschmannstahl.de

www.eschmannstahl.de

~Legal notice: voestalpine High Performance Metals Deutschland GmbH (vaHPMD) has taken greatest care in compiling the information.

It is nevertheless possible that data may have changed in the meantime. vaHPMD disclaims any liability or warranty regarding the accuracy, actuality, correctness and completeness of the information provided. The information within is to be considered as a reference, which is only binding, when specifically referred to in a completed contract with vaHPMD. vaHPMD reserves the right to change the information without notification. vaHPMD explicitly excludes any responsibility for claims or damages, including consequential losses, arising in connection with the use of the data provided. Previous publications are no longer valid.

ESCHMANNSTAHL